



<https://www.uni-luce.com>

+39 339 505 5880

[info@uni-luce.com](mailto:info@uni-luce.com)


Via Monselice, 26, 20832 Desio

MB, Italy

## SPARTA-12 M 30



|                      |                                                                                   |            |       |        |        |        |     |     |     |
|----------------------|-----------------------------------------------------------------------------------|------------|-------|--------|--------|--------|-----|-----|-----|
| Available<br>colors: |  | 1246-W30   |       |        |        |        |     |     |     |
|                      |  | 1246-W30   |       |        |        |        |     |     |     |
|                      |  | 1246-B30   |       |        |        |        |     |     |     |
|                      |  | 1246-DGR30 |       |        |        |        |     |     |     |
| Beam angle:          | 5°                                                                                | 5°         | 8°    | 10°    | 12°    | 20°    | 25° | 30° | 35° |
|                      | 40°                                                                               | 45°        | 60°   | 10x22° | 15x55° | 20x60° |     |     |     |
|                      | 5°                                                                                | 8°         | 10°   | °      |        |        |     |     |     |
| LED Color:           | 3000K                                                                             | 4000K      | 6000K | 5000K  | RGB    | RGBW   |     |     |     |
|                      | 5700K                                                                             |            |       |        |        |        |     |     |     |
| System               | 30W                                                                               |            |       |        |        |        |     |     |     |
| Power:               |                                                                                   |            |       |        |        |        |     |     |     |
| CRI:                 | 90                                                                                |            |       |        |        |        |     |     |     |
| Lumen                |                                                                                   |            |       |        |        |        |     |     |     |
| output:              | 2400lm                                                                            |            |       |        |        |        |     |     |     |
| Material:            | die-casting powder coating aluminum, glass                                        |            |       |        |        |        |     |     |     |
| Location:            | Exterior                                                                          |            |       |        |        |        |     |     |     |
| Fixation:            | Ground, Wall                                                                      |            |       |        |        |        |     |     |     |
| Product              |                                                                                   |            |       |        |        |        |     |     |     |
| dimension:           | D150xL109mm                                                                       |            |       |        |        |        |     |     |     |
| Input:               | 220-240V 50/60HZ                                                                  |            |       |        |        |        |     |     |     |
| IP:                  | 66                                                                                |            |       |        |        |        |     |     |     |
| Class:               | II                                                                                |            |       |        |        |        |     |     |     |
| DIM Option:          | ON/OFF DALI DMX                                                                   |            |       |        |        |        |     |     |     |
| Structure:           | Spot Adjust: 0~180°                                                               |            |       |        |        |        |     |     |     |
| IK:                  | 08                                                                                |            |       |        |        |        |     |     |     |

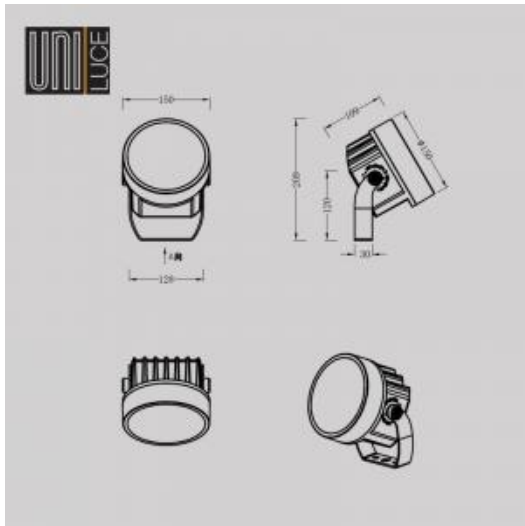



<https://www.uni-luce.com>

+39 339 505 5880

[info@uni-luce.com](mailto:info@uni-luce.com)

Via Monselice, 26, 20832 Desio

MB, Italy

SPARTA spotlights are designed to be both elegant and flexible, offering a wide range of functional and aesthetic options for any project. The light source is multi-zoned, allowing precise lighting control, as well as the ability to combine lighter and darker areas for a seamless blend of lighting and landscape. Different optics and sizes are available, making SPARTA a versatile choice for a variety of applications. SPARTA can be installed ground-mounted, pole-mounted or wall-mounted with anti-glare options available for added light effect. SPARTA spotlight systems are often used for street lighting, where they are mounted on poles or masts to provide illumination in public spaces. These systems offer a number of benefits, including increased visibility, improved safety, and reduced energy consumption. SPARTA systems can be customized to suit specific needs, with options for different lens sizes, color temperatures, and beam angles. Additionally, SPARTA lights are designed to withstand harsh weather conditions and can be integrated with smart lighting systems for remote control and monitoring. Overall, SPARTA lighting is an excellent choice for street lighting applications, providing reliable illumination while saving energy and improving safety.