



<https://www.uni-luce.com>

+39 339 505 5880

info@uni-luce.com

Via Monselice, 26, 20832 Desio

MB, Italy

MARS S RGBW



Available colors:

- ☐ 1559-B2-RGBW
- ☐ 1559-W2-RGBW
- ☒ 1559-GR2-RGBW
- ☒ 1559-DGR2-RGBW
- ☒ 1559-B2-RGBW

Beam angle: 15° 40° 40° 40° 40°

Lamp Power: Red: 1.2W, Green: 1.7W, Blue: 1.3W,
White: 1.9W

CRI: 70

Lamp Lumen: 130lm

Material: aluminium, glass, PC

Location: Exterior

Fixation: Garden spot

Product dimension: D90 x H150mm


Input: 24V DC

IP: 65

Class: III

Structure: Rotation: 30°, Spot Adjust: 0~90°

IK: 08

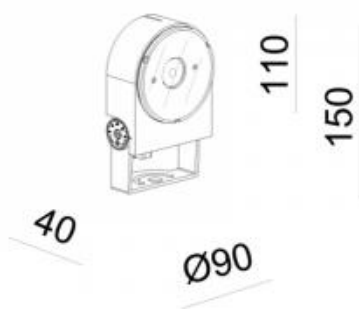



<https://www.uni-luce.com>

+39 339 505 5880

info@uni-luce.com

Via Monselice, 26, 20832 Desio

MB, Italy

MARS, the luminaire head is to be installed on a pin, on a strap or on a simplified bracket. In this way, MARS can easily be transformed to install in between the green, around a tree, a pole or any other surface. To facilitate the installation of multiple MARS luminaires, a degree scale is integrated on the hinge, perfect for precise aiming and a proper repetitive light effect. MARS is presented in RGBW or mono color light.